


ULTRA 1025BT

Battery powered portable

Portability, Versatility, Flexibility in your hand
With Wireless solution

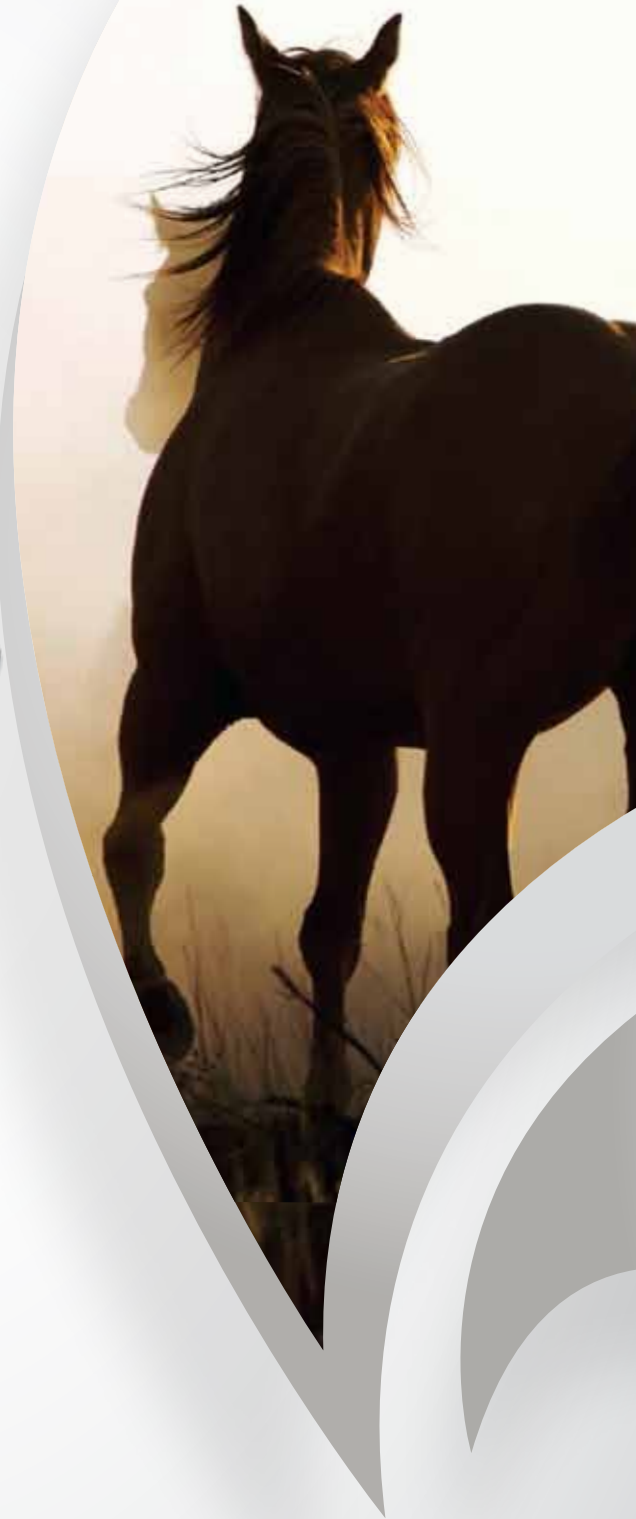

- **Hybrid function**
- Built-in rechargeable Lithium-ion battery
- Battery status indication / Reverse display function
- High-tech wireless connectivity to DR system
- Robust design to meet the needs of anywhere use

ECOVIEV

Battery Powered Portable x-ray unit - ULTRA 1025BT

Description	Specification
Generator Type	High Frequency Inverter
Max. Output Power	1.6 kW
Focal Spot	1.2 X 1.2 mm
kV Range	40 – 100 kV
mA Range	Max. 25 mA
mAs Range	0.32 – 50 mAs
Battery Type	Lithium-Ion Polymer Battery
Battery Power	<ul style="list-style-type: none"> ■ Battery Pack : 58.8 V, 2,600 mAh (14 Cell) ■ Battery Charger <ul style="list-style-type: none"> 1 Input Power : 100 – 240 V~, 50/60 Hz 2 Charger Voltage : 58.8 VDC, 1 A
Laser Pointers	Class 2, One point at 66cm
OP & LED Display	The status of battery charged 7 Segment operation display for kV and mAs setting Ready, X-Ray, Wait & Check (Low voltage or Overload) Collimator Lamp, Laser Pointer, APR Storage Key, Display reverse ON/OFF Battery Charging
Collimator	Max. 35 X 35 cm (66 cm) / Min. 5 X 5 cm (100 cm)
Collimator Lamp	LED Lamp
Protection	Overload protection of high frequency inverter and X-Ray tube
APR Memory	7 Memory standard and extendable to 12 combinations




Operation Panel

* Specifications are subjects to change without prior notice.

Available bluetooth communication with external application

For Complete Wireless & Advanced Technology

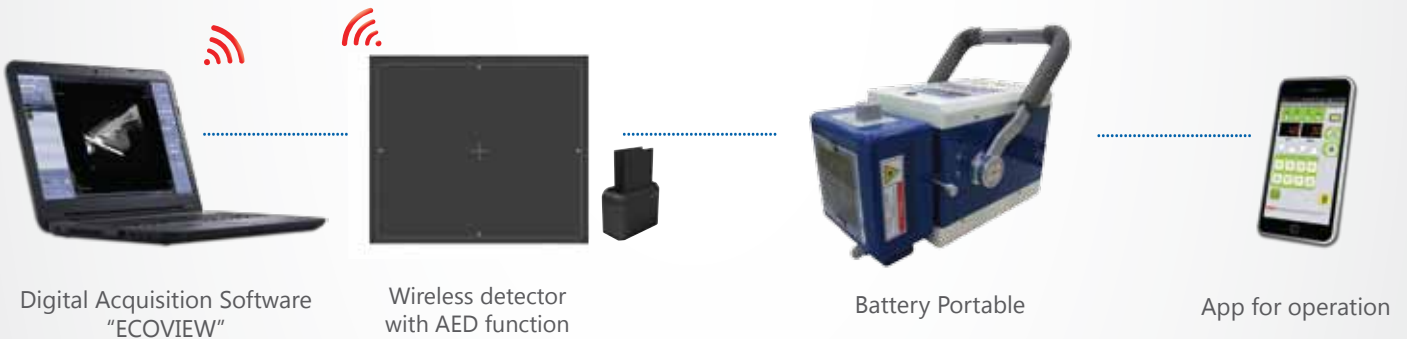

Standard Accessories



ECOVIEW

714~716 ForHu B/D, 58, Wangsimni-ro, Seongdong-gu, Seoul, Korea
 Tel. +82 70 7510 3400 / Fax. +82 70 8630 3420
 sales@ecoray.kr / sales@ecoviewmedical.com